



470 SERIES EK2

BSP
DIN2353

Calibrated steel manufacturing.
Thread combination available upon request of minimum quantities.


• Materials

Carbon Steel EN -10277-3

Seals: NBR, Viton or EPDM

Handle: ZAMAK-5


• Working temperature (Seals)


	NBR	Viton	EPDM
	+100°C	+200°C	+150°C
	-30°C	-10°C	-40°C


- **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC Hammer Application


- **Sectors:** Industrial, Agricultural.



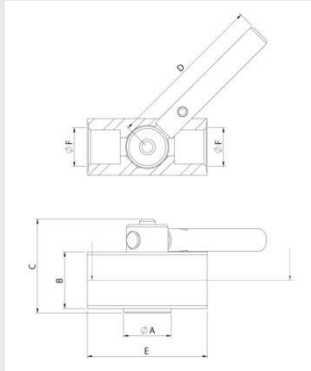

STANDARD MODEL								
DN	Ø F	REF.		Ø A	B	C	D	E
10	3/8" BSP	470.1012AC	250Bar	36	56	26,85	112	53

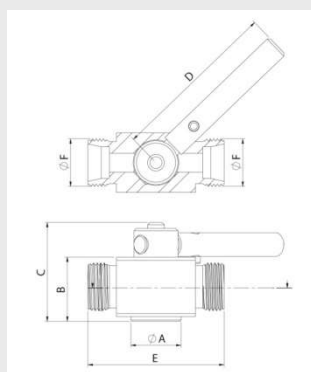

STANDARD MODEL								
DN	Ø F	REF.		Ø A	B	C	D	E
10	M20x1,5	470.1012KFA	250Bar	36	56	26,85	112	53

470-1

