



471 SERIES EK3

BSP

Steel manufacturing.

Designed without inner ball. Spin movement allows opening and closing the valve.
BSP Threads, others available upon request.

• Materials

Carbon Steel *EN -10277-3*

Seals: NBR, Viton or EPDM


Handle: ZAMAK-5

• Working temperature (Seals)

	NBR	Viton	EPDM
	+100°C	+200°C	+150°C
	-30°C	-10°C	-40°C

- **Applications:** Designed for Oil hydraulic Applications according to European Directive 97.23.EC Hammer Application

- **Sectors:** Industrial, Agricultural.

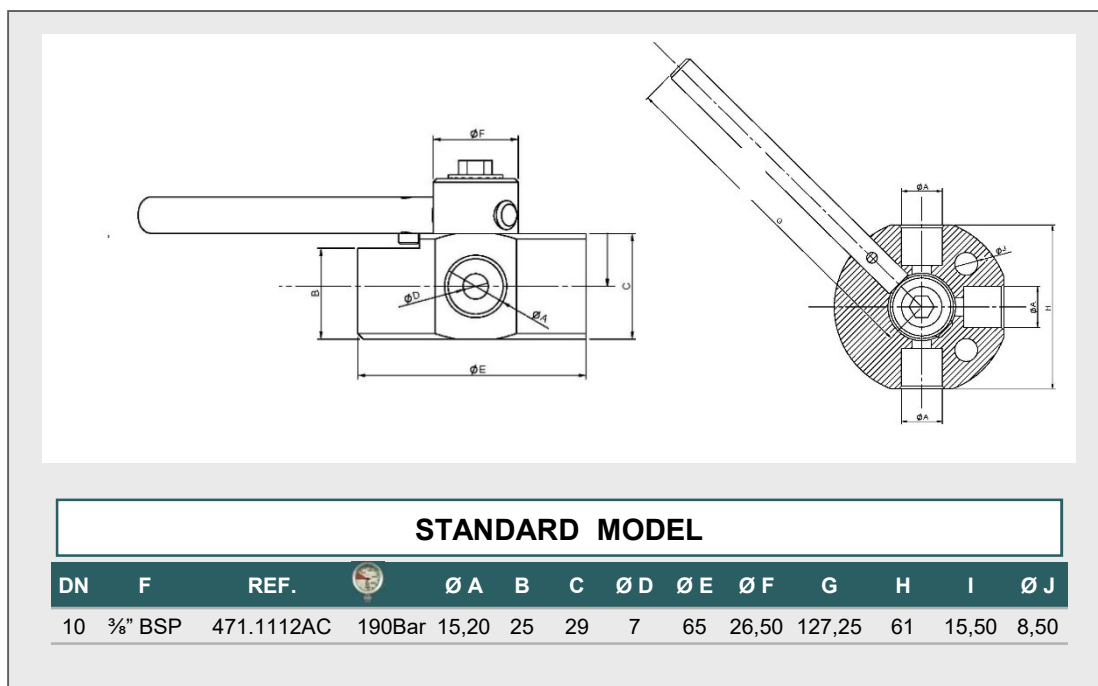

471-1